






SURFACE MOUNT DRUM FIXTURES G2 LED CR G2 LIGHT ENGINE



future-proof & flexible drums



- Choose from 5 fixture styles with multiple diameters.
- Flexible: FlexWatt allows you to select between 4 wattages & FlexColor between 3 colors... all in the same fixture!
- Future-proof: Powered by easily replaceable & upgradeable LED CR G2 light engine.
- Optional emergency battery back-up and/or control options.



ORDER CONTROL READY, BASIC CONTROL OR LG ADVANCED CONTROL

DEFAULT CONFIGURATIONS

PART #	UPC	DESCRIPTION	WATTAGE	LUMENS	LPW	CCT (K)
RP-DRU-11N-14L-40K-WC-G2-A	844006022617	11IN UTILITY DRUM	6/ 10 /16/22	780-3124	130-142	3000/3500/ 4000
RP-DRU-11N-14L-40K-WC-G2-OC1-A	844006022631	11IN UTILITY DRUM WITH HIGH/LOW MOTION SENSOR	6/ 10 /16/22	780-3124	130-142	3000/3500/ 4000
RP-DRU-14N-14L-40K-WC-G2-A	844006022624	14IN UTILITY DRUM	6/ 10 /16/22	780-3124	130-142	3000/3500/ 4000
RP-DRU-14N-14L-40K-WC-G2-OC1-A	844006022648	14IN UTILITY DRUM WITH HIGH/LOW MOTION SENSOR	6/ 10 /16/22	780-3124	130-142	3000/3500/ 4000
RP-DRD-14N-14L-40K-WC-G2-A	844006040673	14IN DESIGNER DRUM	6/ 10 /16/22	780-3124	130-142	3000/3500/ 4000
RP-DRD-14N-14L-40K-WC-G2-OC1-A	844006040680	14IN DESIGNER DRUM WITH HIGH/LOW MOTION SENSOR	6/ 10 /16/22	780-3124	130-142	3000/3500/ 4000
RP-DRD-18N-14L-40K-WC-G2-A	844006040697	18IN DESIGNER DRUM	6/ 10 /16/22	780-3124	130-142	3000/3500/ 4000
RP-DRD-18N-14L-40K-WC-G2-OC1-A	844006040703	18IN DESIGNER DRUM WITH HIGH/LOW MOTION SENSOR	6/ 10 /16/22	780-3124	130-142	3000/3500/ 4000

Default settings are above in bold. See pages 2 and 3 for additional styles, lumen packages, color temperatures and options.




RemPhos by Light Efficient Design
lighting on target

LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

SURFACE MOUNT DRUM FIXTURES G2 LED CR G2 LIGHT ENGINE

PART NUMBER BUILDER

MFR	PRODUCT	SIZE	LUMENS	COLOR	FUNCTION	GEN	OPTIONS	BAA	REV-A
RP					WC	G2			
	DRU=UTILITY DRUM DRD=DESIGNER DRUM DRO=OUTDOOR DRUM DRT=TOUGH DRUM DRG=GLASS DRUM	11N/14N 14N/18N 12N 13N 15N N = INCHES	8L 14L 23L 31L	30K = 3000K, 85CRI 35K = 3500K, 85CRI 40K = 4000K, 85CRI	WC= FlexWatt + FlexColor		OCC=high/low motion sensor * EMG=90 min emergency battery backup † LVD=120-277V line voltage dimming.	BLANK=NON-BAA BAA=BAA Section 1605 Compliant 	

ORDERING EXAMPLE

RP-DRU-11N-8L-830-WC-G2

Default lumen package (wattage and CCT) are shown below in bold. There are two ways to achieve a non-default lumen package and/or CCT:


1. You can easily adjust in field via our FlexWatt and FlexColor internal switches. 2. Have us adjust the FlexWatt and FlexColor at the factory for an additional charge.

EFFICIENCY/ELECTRICAL DATA

LUMEN SELECTION	CCT SELECTION		
	830	835	840
8L	780LM, 6W	780LM, 6W	816LM, 6W
14L	1370LM, 10W	1440LM, 10W	1370LM, 10W
23L	2256LM, 16W	2240LM, 16W	2352LM, 16W
31L	2970LM, 22W	3080LM, 22W	3124LM, 22W

ORDERING GUIDE (Default part numbers listed below. Please Use the part number builder for additional configurations.)

DRU - UTILITY DRUM 11" OR 14"

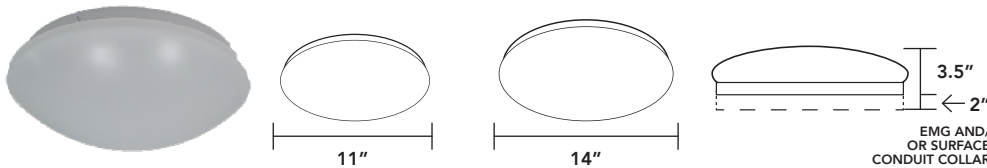

- Flexible lens made from high transmission, UV blocking acrylic plastic.
- Thick metal, white painted base.
- Lens attaches to metal base via twist lock - no tools required.
- Available in 11in and 14in diameters.

CASE QTY	QUICK SHIP	ENERGY STAR	DEFAULT PART #	UPC	DESCRIPTION	WATTAGE	LUMENS	LPW	CCT (K)
1	●	●	RP-DRU-11N-14L-40K-WC-G2-A	844006022617	11IN UTILITY DRUM	6/10/16/22	780-3124	130-142	3000/3500/4000
1	●	●	RP-DRU-11N-14L-40K-WC-G2-OC1-A	844006022631	11IN UTILITY DRUM WITH HIGH/LOW MOTION SENSOR	6/10/16/22	780-3124	130-142	3000/3500/4000
1	●	●	RP-DRU-14N-14L-40K-WC-G2-A	844006022624	14IN UTILITY DRUM	6/10/16/22	780-3124	130-142	3000/3500/4000
1	●	●	RP-DRU-14N-14L-40K-WC-G2-OC1-A	844006022648	14IN UTILITY DRUM WITH HIGH/LOW MOTION SENSOR	6/10/16/22	780-3124	130-142	3000/3500/4000

Default lumen package (wattage and CCT) are bold.

RemPhos by Light Efficient Design
lighting on target

LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949


847.380.3540 • led-llc.com

2.5.20 Information is subject to change without notice.

SURFACE MOUNT DRUM FIXTURES G2 LED CR G2 LIGHT ENGINE



DRD - DESIGNER DRUM 14" OR 18"

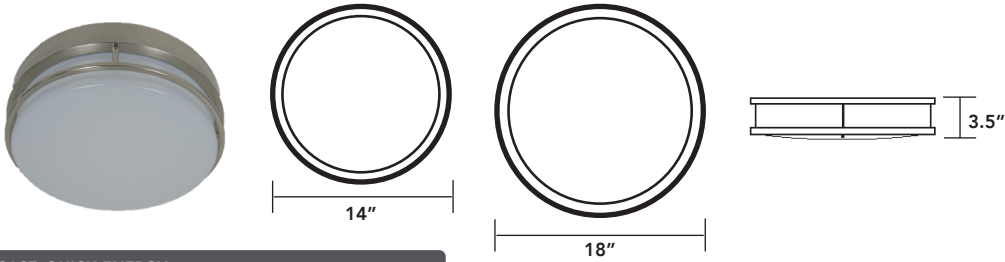


- Flexible lens made from high transmission, UV blocking acrylic plastic.
- Thick metal base, brushed nickel plated base, trim rings and hardware.
- Available in 14.5in and 18in diameters.
- Contact us for custom paint colors such as white, brass or bronze.

CASE QTY	QUICK SHIP	ENERGY STAR	DEFAULT PART #	UPC	DESCRIPTION	WATTAGE	LUMENS	LPW	CCT (K)
1	●	●	RP-DRD-14N-14L-40K-WC-G2-A	844006040673	14IN DESIGNER DRUM	6/10/16/22	780-3124	130-142	3000/3500/4000
1	●	●	RP-DRD-14N-14L-40K-WC-G2-OC1-A	844006040680	14IN DESIGNER DRUM WITH HIGH/LOW MOTION SENSOR	6/10/16/22	780-3124	130-142	3000/3500/4000
1	●	●	RP-DRD-18N-14L-40K-WC-G2-A	844006040697	18IN DESIGNER DRUM	6/10/16/22	780-3124	130-142	3000/3500/4000
1	●	●	RP-DRD-18N-14L-40K-WC-G2-OC1-A	844006040703	18IN DESIGNER DRUM WITH HIGH/LOW MOTION SENSOR	6/10/16/22	780-3124	130-142	3000/3500/4000

Default lumen package (wattage and CCT) are bold.

DRO - OUTDOOR DRUM 12"

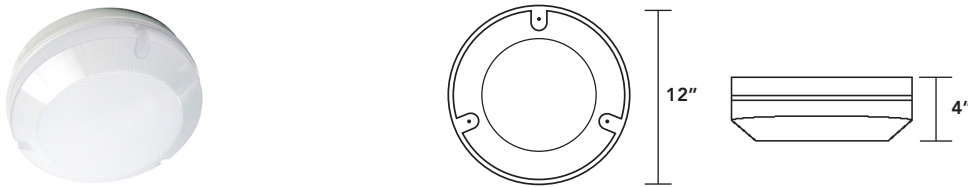


- Vandal resistant and watertight/wet-rated.
- Strong rigid lens made from high transmission, UV blocking polycarbonate .
- Strong white polycarbonate base.
- Available in 12in diameter.

CASE QTY	QUICK SHIP	ENERGY STAR	DEFAULT PART #	UPC	DESCRIPTION	WATTAGE	LUMENS	LPW	CCT (K)
1	●	●	RP-DRO-12N-14L-40K-WC-G2	844006015763	12IN OUTDOOR DRUM	6/10/16/22	780-3124	130-142	3000/3500/4000
1	●	●	RP-DRO-12N-14L-40K-WC-G2-OC1	844006019983	12IN OUTDOOR DRUM WITH HIGH/LOW MOTION SENSOR	6/10/16/22	780-3124	130-142	3000/3500/4000

Default lumen package (wattage and CCT) are bold.

SURFACE MOUNT DRUM FIXTURES G2 LED CR G2 LIGHT ENGINE

DRT - TOUGH DRUM 13"





- Vandal resistant and watertight/wet-rated.
- Strong rigid lens made from high transmission, UV blocking polycarbonate.
- Thick metal, black painted base, trim rings and hardware.
- Available in 13in diameter. Contact us for custom paint colors such as white, brass or bronze.

CASE QTY	QUICK SHIP	ENERGY STAR	DEFAULT PART #	UPC	DESCRIPTION	WATTAGE	LUMENS	LPW	CCT (K)
1	●	●	RP-DRT-13N-14L-40K-WC-G2	844006015794	13IN TOUGH DRUM	6/10/16/22	780-3124	130-142	3000/3500/ 4000
1	●		RP-DRT-13N-14L-40K-WC-G2-OC1	844006010492	13IN TOUGH DRUM WITH HIGH/LOW MOTION SENSOR	6/10/16/22	780-3124	130-142	3000/3500/ 4000

Default lumen package (wattage and CCT) are bold.

DRG - GLASS DRUM 15"



- Diffused glass lens.
- Brushed aluminum finished base and hardware.
- Available in 15in diameter. Contact us for custom paint colors such as white, brass or bronze.

CASE QTY	QUICK SHIP	ENERGY STAR	DEFAULT PART #	UPC	DESCRIPTION	WATTAGE	LUMENS	LPW	CCT (K)
1	●	●	RP-DRG-15N-14L-40K-WC-G2	844006010508	15IN GLASS DRUM	6/10/16/22	780-3124	130-142	3000/3500/ 4000
1	●		RP-DRG-15N-14L-40K-WC-G2-OC1	844006010515	15IN GLASS DRUM WITH HIGH/LOW MOTION SENSOR	6/10/16/22	780-3124	130-142	3000/3500/ 4000

Default lumen package (wattage and CCT) are bold.

SURFACE MOUNT DRUM FIXTURES G2 LED CR G2 LIGHT ENGINE



HOW DOES IT WORK?

Our exclusive LED driver is designed to operate at 90%+ efficiency at each wattage setting. Standard drivers would have much lower efficiency as low as 60% and would result in poor performance and reduced efficacy.


WHAT ARE THE WATTAGE CHOICES?

Please reference this table and the ordering guide on the last page of the cut sheet.

FLEXWATT TURN DIAL POSITION				
STYLE	0	1	2	3
LED CR	6W (8L)	10W (14L)	16W (23L)	22W (31L)
LED SR	6W (8L)	10W (14L)	12W (17L)	15W (21L)

HOW EASY IS IT TO SET?

Simply slide off the driver door, adjust the 4-position turn dial with a small, flat-head screw driver, and replace the door. Quick and easy. Can be "locked-out" to prevent field-adjustability if desired.

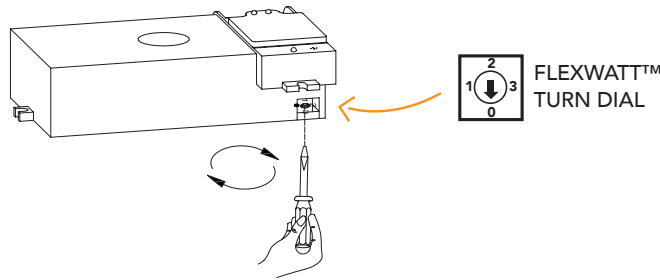

HOW DOES IT WORK?

We select the highest efficacy, multiple color LED diodes from quality suppliers, and mount them on the same circuit board. A proprietary LED binning process ensures color consistency between fixtures. The FlexColor technology controller ensures the correct color is selected, every time.


WHAT ARE THE COLOR CHOICES?

3000k, 3500k and 4000k. Please reference this table and the ordering guide on the last page of the cut sheet.


FLEXCOLOR SLIDE SWITCH POSITION		
TOP	MIDDLE	BOTTOM
3000K	3500K	4000K

HOW EASY IS IT TO SET?

Adjust the 3-position slide switch with your finger. Quick and easy. Can be "locked-out" to prevent field-adjustability if desired.

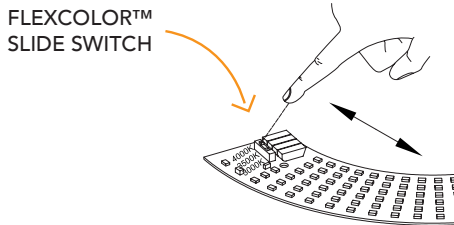

12v Aux - 50mA
10V DIM-to-OFF

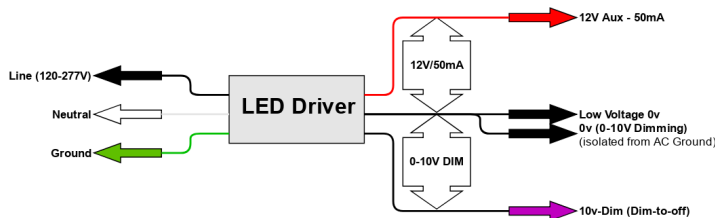

RemPhos by Light Efficient Design
lighting on target

LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

SURFACE MOUNT DRUM FIXTURES G2 LED CR G2 LIGHT ENGINE



CUT-OUT IN CENTER OF DRIVER ALLOWS FOR THREADED RODS

INCOMING POWER QUICK DISCONNECT LOCATED ON TOP OF CHASSIS FOR EASY AND SAFE WIRING.

MULTIPLE CHASSIS CUT-OUTS FOR FLEXIBLE WIRING OPTIONS

OPTIONAL INTEGRATED HIGH/LOW MOTION AND DAY-LIGHT SENSOR. COMPLETELY ADJUSTABLE AND HIDDEN BEHIND THE FIXTURE LENS

5KVA DRIVER HOUSING. MEETS UL1598C REGULATIONS

CURVED LED BOARDS CAN EXPAND TO FIT SMALL TO LARGE FIXTURES

KEYHOLE SLOTS AND MULTIPLE HOLES FOR FLEXIBLE MOUNTING OPTIONS

STRONG RARE EARTH MAGNETS FOR EASY INSTALLATION

CONTROL OPTIONS

CONTROL READY

DRIVER

10V DIM

12V POWER

All LEDCR/SR models come standard as factory enabled to add controls at the factory, in the field or at a later date. Driver comes with 10V dimming and 12V DC power wiring.

BASIC CONTROL

OCC SENSOR

Integrated high frequency, high/low motion and daylight sensor. Can be mounted behind glass or plastic lens. Purchase optional remote control to adjust settings.

ORDERING CODES
SENSOR = OCC / RC = HNSIII REMOTE

ADVANCED WIRELESS CONTROL

MAGNUM INDUSTRIES

avi-on

PHILIPS

LUTRON

We partner with Magnum, avi-on, Philips, Lutron and other intelligent wireless lighting control systems. Allows for occupancy sensing, daylight harvesting, grouping, scheduling, high-end trim and more. Adjust settings via iPhone/Android apps. Contact us for

EASILY RETROFIT THESE FIXTURE STYLES, AND MORE!

LED CR G2-9IN/SURFACE MOUNT

LED CR G2-9IN/SURFACE MOUNT

LED SR G2-9IN/SCONCE