


JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

## DIMENSIONS:

4"(H) x 14" (Diameter)

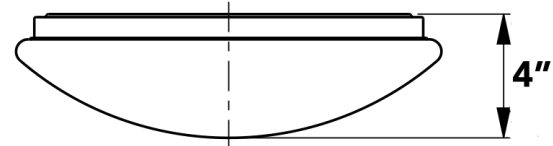

## FCR-14-MCT

### LED CLOUD FIXTURES

Ideal for New as well as old residential and commercial constructions.

#### ELECTRICAL SPECIFICATIONS:

- Voltage: 120VAC
- Wattage: 22W
- Power factor: >0.90
- Efficacy: 81LM/W

#### HOUSING SPECIFICATIONS:

- 1" deep
- Steel base with white powdercoat finish
- PMMA Lens material
- closed cell Neoprene foam gasket
- Maximum Ambient Temperature: 104°F
- Suitable for damp locations when gasket is used

#### CERTIFICATIONS: ETL,ES



#### LIGHTING SPECIFICATIONS:

- Dimmable: Dimmable down to 10% using an approved dimmer
- LED: Seoul DOB (Driver On Board) Technology
- Optics: White translucent acrylic
- Total lumens: 1800LM
- Color temperature: MCT: 3000K/4000K/5000K
- Color rendering index: >80

#### FACTORY INSTALLED OPTIONS



Shown with OPT-EM-FCR14



MODEL	DESCRIPTION
OPT-EM-FCR14	Emergency Battery Backup for FCR
OPT-PC-FM	Photocell for FCR
OPT-SEN-2US	Sensor for FCR
OPT-SEN-2USRC	Remote Control for FCR

#### WARRANTY: 5 years

