


PRODUCT DESCRIPTION:

Great for general flood lighting, corridor lighting, security lighting, and roof top lighting.


FEATURES:

- Flexible, modular design
- Fully sealed with an IP rating of 65
- Multiple choices of optical lenses
- Easy installation and maintenance
- Corrosion & rust proof

DIMENSIONS:

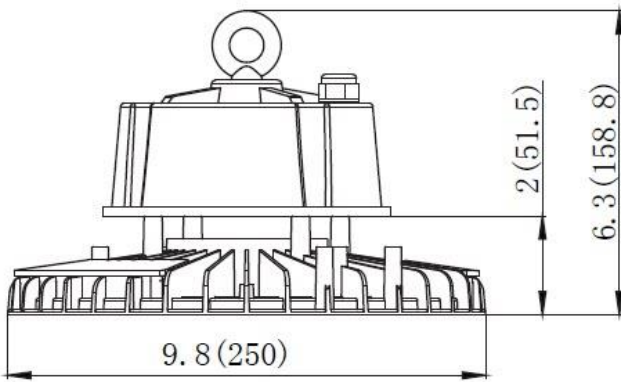

PHOTOMETRIC:

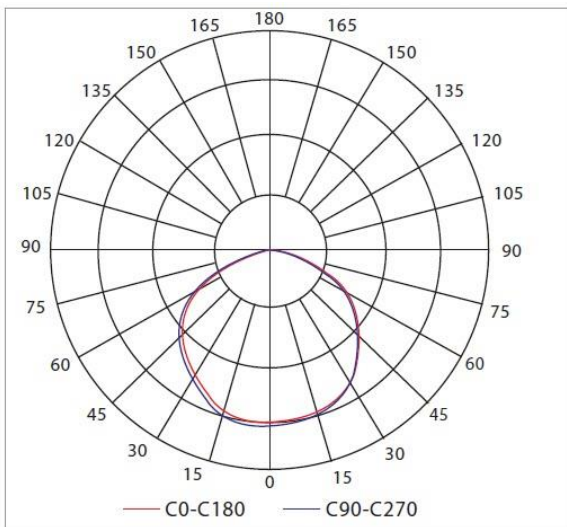

100W High Bay

LOC-SLHB-100W50K



INSTALLATION OPTIONS:



SPECIFICATIONS:

SPECIFICATION	Details
Model	LOC-SLHB-100W50K
Input Wattage (W)	100W
Lumens Delivered (LM)	15,000LM
Efficacy (LM/W)	150LM/W
CRI	70
Lifespan	50,000 hours
Color Temperature	5,000K
Wattage Equivalent	250W – 400W HID
Dimmable	Yes
IP Rating	IP65
Beam Angle	120
Input Voltage	AC120-277V
Power Factor	0.92
Housing	Aluminum
Lens	Clear
Mounting	Hook Mount or Bracket
Size	9.84" x 6.25"
Weight	5.73 lbs
THD	15%
Certification	
Operating Temperature	-40°C to 50°C
Environment	Outdoor
Warranty	5 years limited

4,000K is special order

OPTIONAL ACCESSORIES:




Dimmable Motion
Sensor
0-12V DC



Aluminum Reflector



PC Reflector



4w up light