

Date: \_\_\_\_\_ Location: \_\_\_\_\_  
 Product: \_\_\_\_\_ Project: \_\_\_\_\_  
 Quantity: \_\_\_\_\_ Catalog #: \_\_\_\_\_

## LED LOC-WP Wall Pack Light Series



40W, 60W, 80W & 120W

### Special Order:

- Other CCTs

### CONSTRUCTION:

Heavy die-cast aluminum housing with polyester powder-coated finish. Integral secondary heat sink to optimize thermal transfer and maximize performance of the LEDs. Driver is mounted in direct contact with the casting for low operating temperature.

### OPTICAL SYSTEM:

Seoul 2835 LED chips. High quality tempered glass optics. 120° beam angle.

### WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

### ELECTRICAL:

Available as 120-277V input. -20°C to 50°C

### INSTALLATION & MOUNTING:

Wall Mounting with quick mount back plate for easy installation.

### CONTROLS & DIMMING:

0-10V dimming comes standard. Photocell is included.

### FEATURES

- IP65 rated
- Easy installation and maintenance
- Corrosion and rust proof
- Semi cut-off
- 50,000 hours lifetime

### SUITABLE APPLICATIONS


- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships



MODEL NUMBER – 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-WP-40W50KD-LV	40W	5,800LM	145LM/W	80	0.9	20%	70W – 150W HID
LOC-WP-60W50KD-LV	60W	8,700LM	145LM/W	70	0.9	20%	175W – 250W HID
LOC-WP-80W50KD-LV	80W	11,600LM	145LM/W	70	0.9	20%	250W – 320W HID
LOC-WP-120W50KD-LV	120W	17,400LM	145LM/W	80	0.9	20%	320W – 400W HID

Series	Wattage	Color Temperature	Dimming	Voltage
LOC-WP	40W 60W 80W 120W	5000K	Dimmable	LV = 120-277V

## MEASUREMENTS

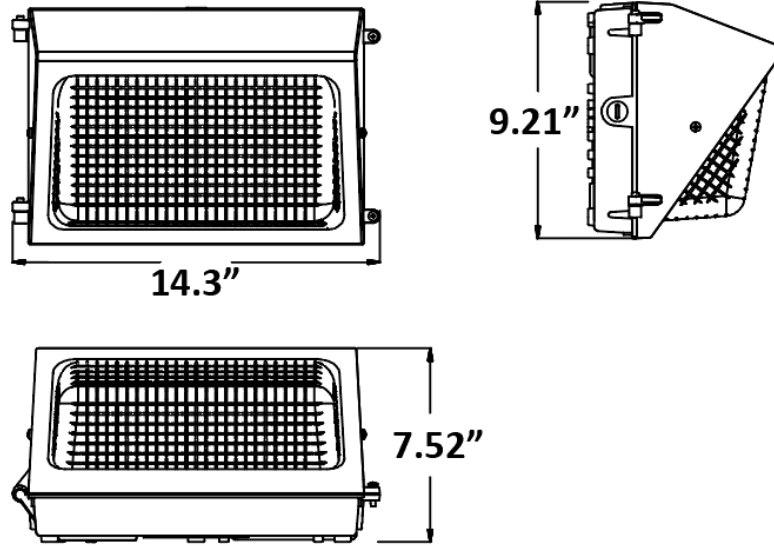


40W, 60W, 80W & 120W


MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-WP-40W50KD-LV	1	8.14 lbs	00815586029174
LOC-WP-60W50KD-LV	1	8.14 lbs	00815586029181
LOC-WP-80W50KD-LV	1	8.33 lbs	00815586029198
LOC-WP-120W50KD-LV	1	9.33 lbs	00815586029273

## 40W

BUG Rating: B2-U3-G3

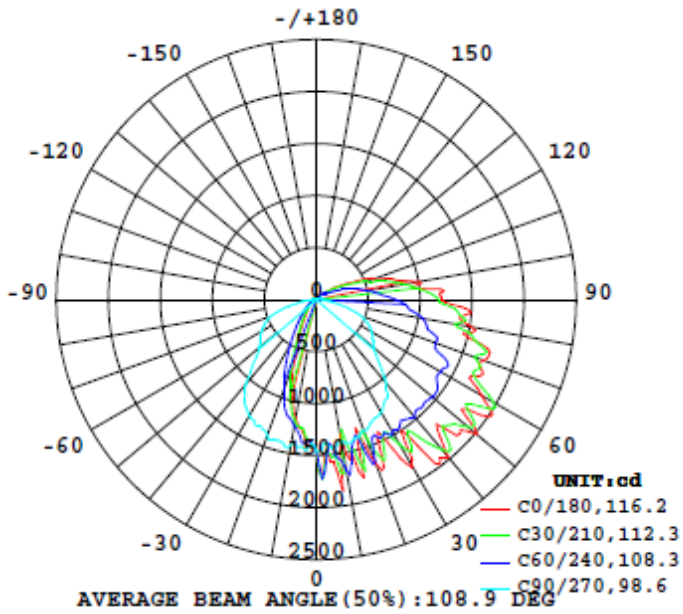


Flux out: 2325 lm

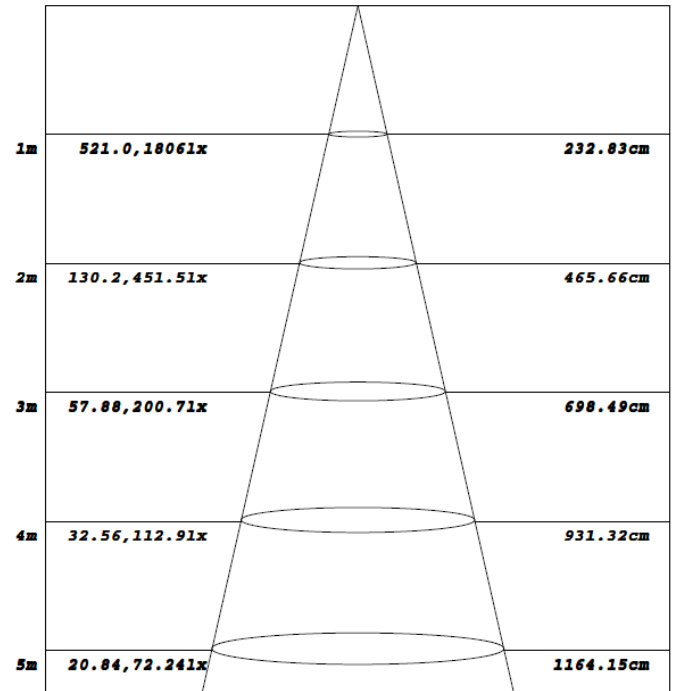


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

## 60W

BUG Rating: B2-U4-G3

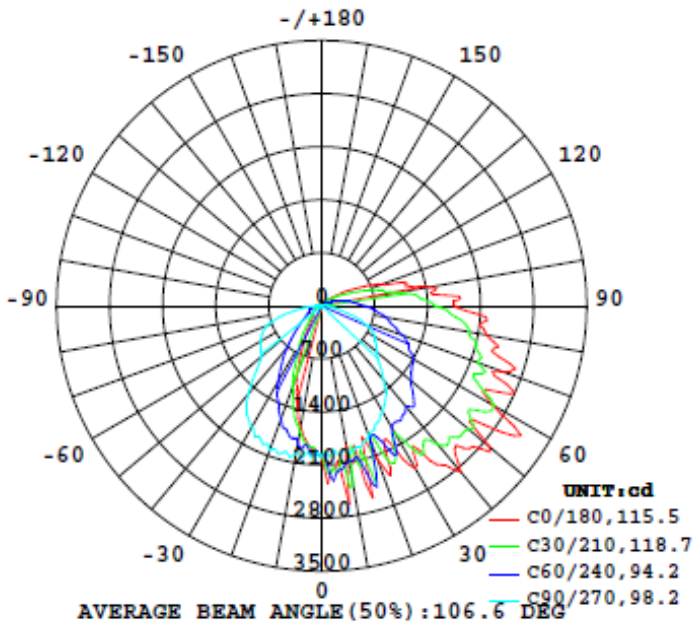



Flux out: 3277 lm

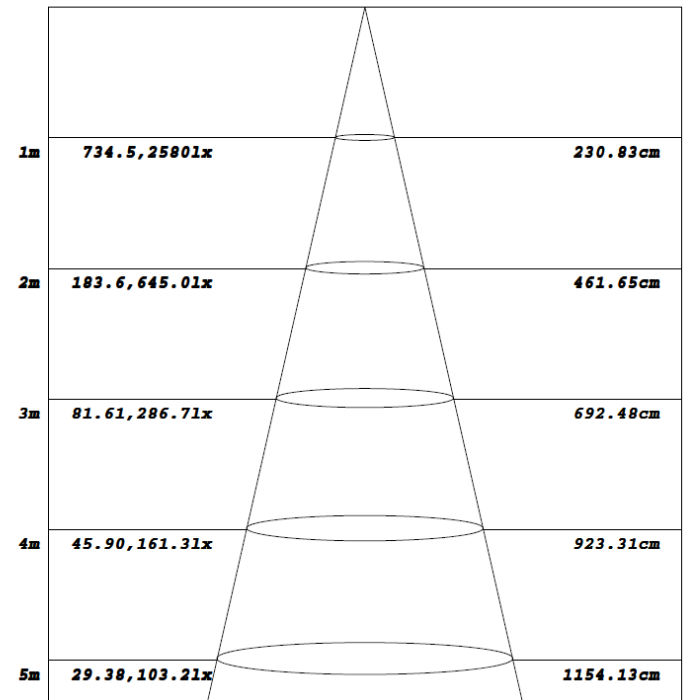

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

## 80W

BUG Rating: B3-U4-G4

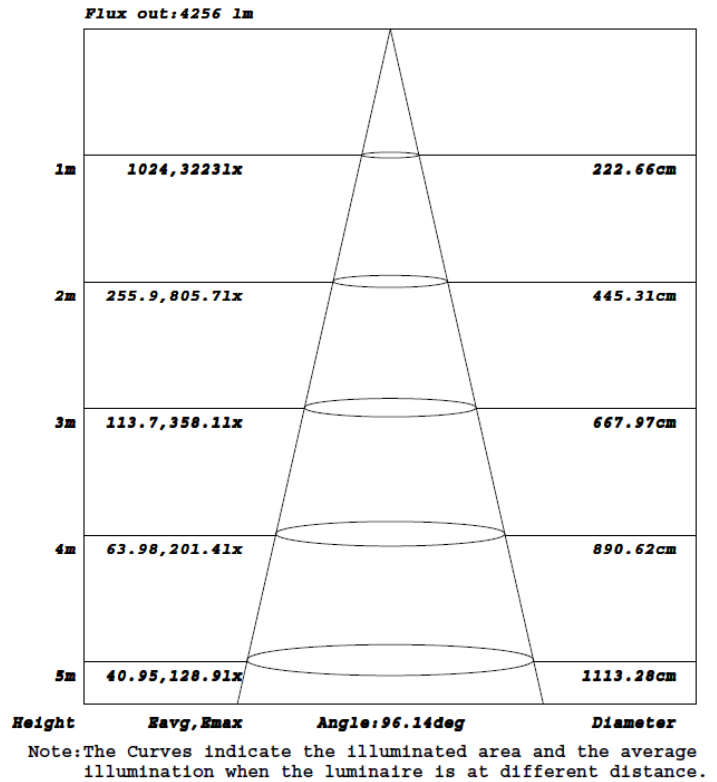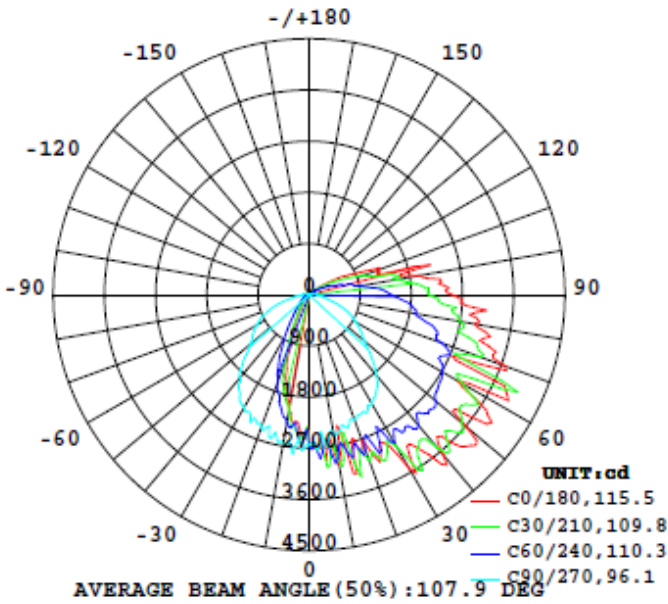

## 120W

BUG Rating: B3-U5-G5

