

TWINKO Solar Light Tower

APPLICATIONS

Unlike other construction site light towers, TWINKO has removable double mast heads for storage. SOLTECH provides solar light fixtures for every application. At 16 feet high, TWINKO creates a wider illumination area that is ideal for parking lots, construction sites, mining camps, events, roadwork, and more.

DESCRIPTION

TWINKO mobile solar light tower provides versatile temporary lighting. It's ideal for construction sites, natural disasters, and mining operations. The double heads can be assembled with SUNLIKE 20W/30W and SUNLIKE PRO 30W. TWINKO light tower can be easily transported from location to location.

CATALOG	COMMENTS
PROJECT	
PREPARED BY	
DATE	

LIGHTING FIXTURE OPTIONS

- · SUNLIKE PRO 30W X1 6,000 lumen
- · SUNLIKE 30W X1 6,000 lumen
- SUNLIKE 20W X2 8,000 lumen (SOLAR FIXTURE NOT INCLUDED)



ORDERING INFORMATION

TOWER		FIXTURE					
STLTWR01E=TWINKO Solar	SERIES	WATTAGE	OPTIC TYPE	COLOR TEMPERATURE	MOUNTING OPTIONS	FINISH	FIXTURE QTY
Mobile Tower	STLSTC=SUNLIKE STLSTCPRO =SUNLIKE PRO	20=20W 4000 Lumens (only for SUNLIKE) 30=30W 6000 Lumens	T2=TYPE II (only for SUNLIKE 30W SUNLIKE PRO 30W) T3=TYPE III T4=TYPE IV (only for SUNLIKE 30W SUNLIKE PRO 30W)	3=3000K 4=4000K 5=5000K 6=5700K	SF =Slip Fitter	GY =Gray	1=1 2=2 (only for SUNLIKE 20W)
		-	-	-		-	-

SPECIFICATION FEATURES



Flexible Range of Visibility

- 150 AH, 1,500 W integrated gel-battery ensures 120 cycles of raising and lowering the mast, one charge lasts an entire month.
- 16 foot tower height provides a wider range of illumination area.



Heavy Duty Guarantee

- · Aluminium mast, 4 sections, 16 ft max.
- Electrical winch rated to 3,000 lbs with limit sensor, DC 12V



Easy Deploy & Move

- Forklift pocket, base 1m x 1m (40 in x 40 in, matches a standard pallet)
- 4 manual stabilizer legs



Lower Costs

- · No trenching, cabling, electricity nor diesel costs
- · Zero emission of greenhouse gases



Clean, Quiet & Environmentally Friendly

- · No generator emissions
- · Quiet and produce no exhausts
- · Direct alternative to diesel, gas, or electric grid



Meet Specific Lighting & Operating Requirements

- 120VAC input plug
- · SUNLIKE mounting accessories included
- · Creates a wider illumination area at 16 ft high




CATALOG	COMMENTS
PROJECT	
PREPARED BY	
DATE	



CATALOG	COMMENTS
PROJECT	
PREPARED BY	
DATE	

PRODUCT SIZE

6.9 ft

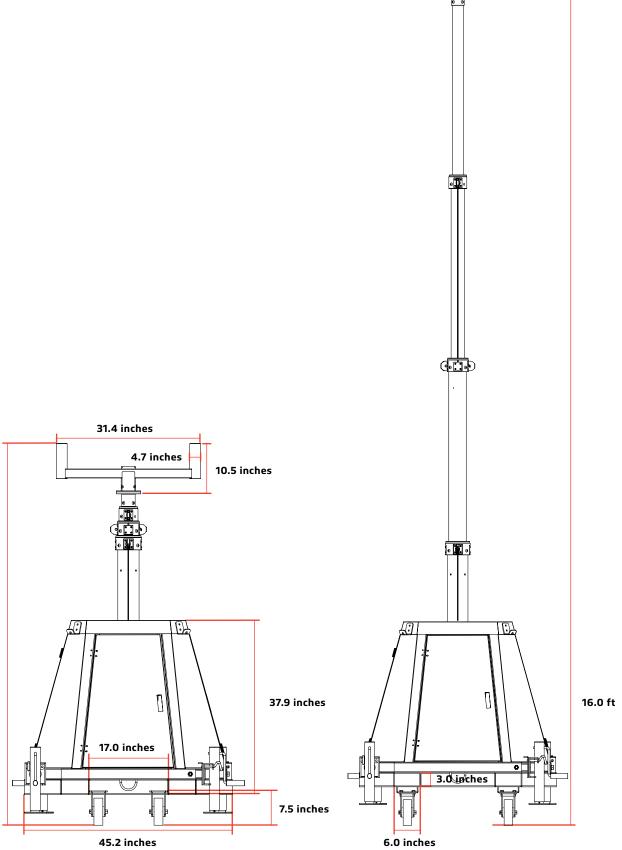

SPECIFICATIONS

Specifications	TWINKO
Max Height	16 ft (Without Luminaire)
Collapsed Height	6.9 ft (Without Luminaire)
Mast Material	Steel
Mast Profile	Round
Mast Sections	4
Operation	Electric Winch 3000 Lbs, DC12V
Battary	GEL DC12V 150AH, 1,200 times Lift and Down Autonomy
Charger	1,500W AC 110V Input
Mast Max Load	88 Lbs
Max Wind Speed	90 mph
Warning Strips	Included
Lift Limit Stopper	Included
Lifting Eyes	X4
Fork Pockets	Included
Wheel	Included (With Brake)
Mast Flange	Included
Weight	1,210 Lbs (Without Luminaire)
Dimensions	45.2 inches X 45.2 inches X 83.0 inches (Collapsed Without Luminaire)

45.2 litches 6.0 litches




CATALOG	COMMENTS
PROJECT	
PREPARED BY	
DATE	

02. Install Luminaire

	®
(8)	SOLTECH Smart Solar Lighting
	Smart Solar Lighting
TWIN	I KO Solar Light Tower


CATALOG	COMMENTS
PROJECT	
PREPARED BY	
DATE	

01. Install Tenon

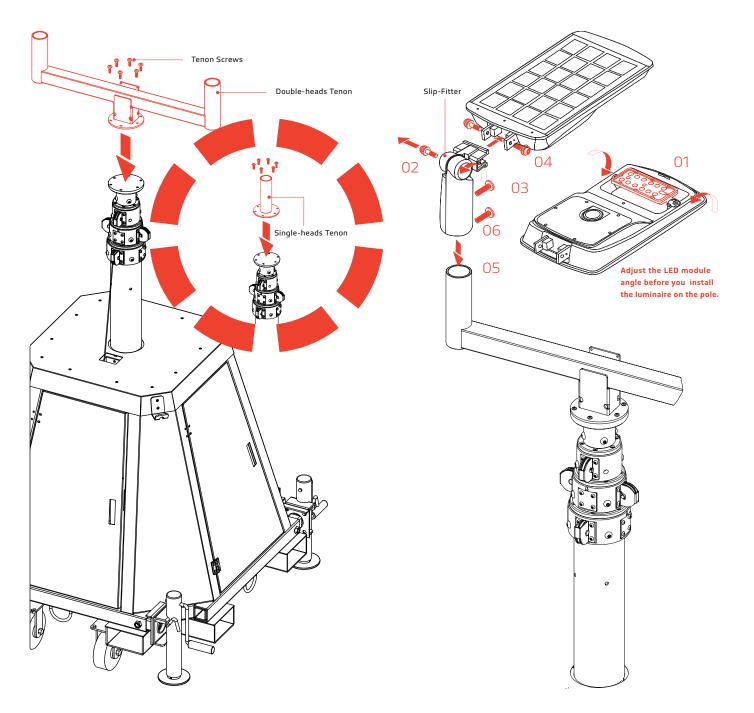

Install Tenon on the top of the pole.

03. Adjust The Pole Height

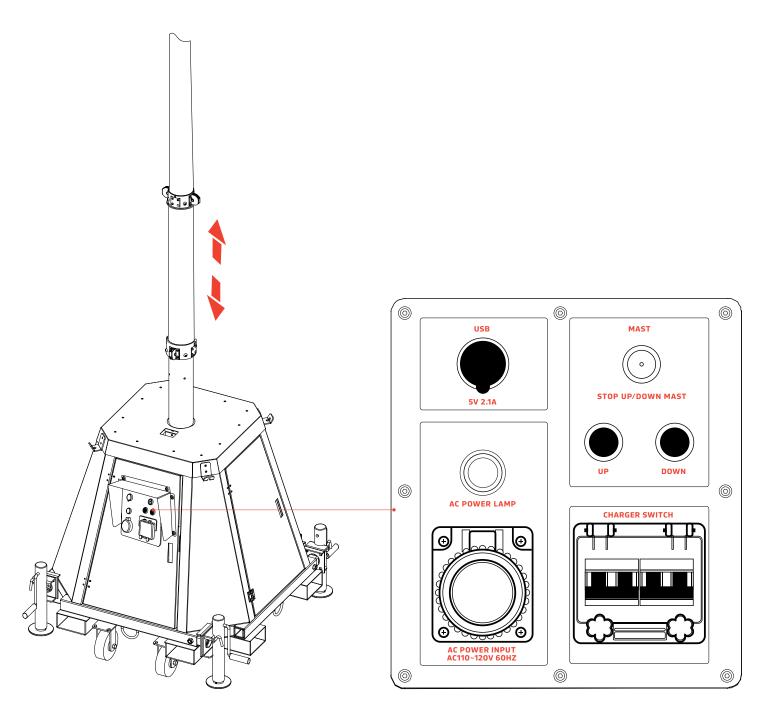

Press the UP and DOWN buttons on the control board to adjust the pole height.

Control Board

04 05



CATALOG	COMMENTS
PROJECT	
PREPARED BY	
DATE	

SOLTECH Smart Solar Lighting TWINKO Solar Light Tower


CATALOG	COMMENTS
PROJECT	
PREPARED BY	
DATE	


TWINKO with SUNLIKE 20W (Four light towers on a regular

soccer field) **Lights:** Two 20W

fixtures per tower

Light height: 16ft
Lighting Area: 400 X 250 ft
Luminosity: 0.23 fc average
across entire area

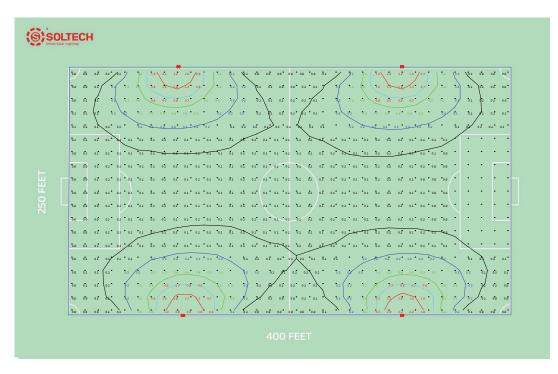


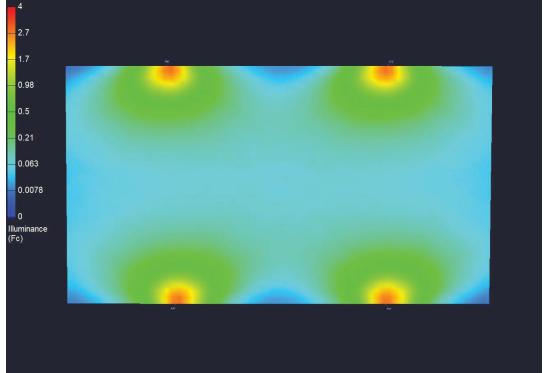


TWINKO with SUNLIKE 30W (Eight light towers on a regular

soccer field)
Lights: One 30W
fixtures per tower
Light height: 16ft
Lighting Area: 400 X 250 ft

Luminosity: 0.33 fc average across entire area

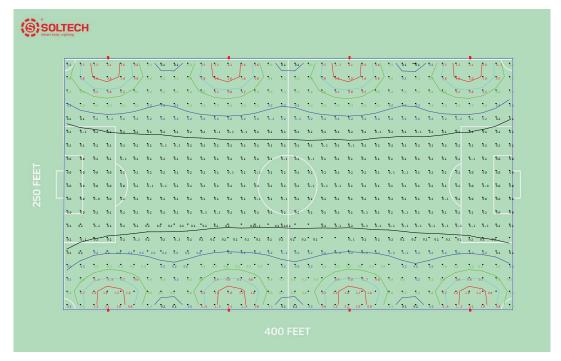

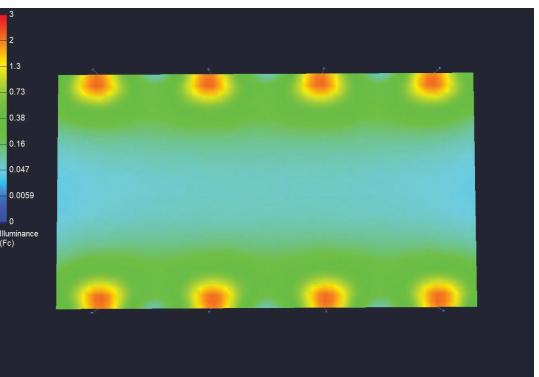

06 07



CATALOG	COMMENTS
PROJECT	
PREPARED BY	
DATE	

WARRANTY

TWINKO Solar Mobile Tower products are covered by a 5 year limited warranty. SOLTECH warrants to the original purchaser that this product is free from defects in materials and workmanship for the period of 5 years from date of purchase. To obtain warranty service please contact your local distributor or sales rep for further instruction.



1460 Park Avenue. Emeryville, CA 94608 USA

www.soltechlighting.com

SOLTECH LLC reserves the right to update all product data sheets at any time. Consult SOLTECH marketing specialists for publication updates at hello@soltechlighting.com

Copyright©2022-2023 SOLTECH LLC, All Rights Reserved.