

# LEDone<sup>®</sup>

## LOC-RDDL-MCCT Series Installation Guide

### SAFETY INSTRUCTIONS: Read instructions carefully before attempting to install fixture.

- Fixture must be wired in accordance with the National Electrical Code and all applicable local codes.
- Proper grounding is required for safety.
- This product must be installed in accordance with the applicable installations code by a person familiar with the construction and operation of the product and the hazards involved.

### CAUTION: Risk of fire

- **Risk of electrical shock!** Disconnect power before installing or servicing.
- No user serviceable parts inside. To avoid electrical shock, do **NOT** disassemble the product.
- **WARNING:** Risk of fire or electric shock, installation requires knowledge of luminaires electrical systems. If not qualified, do **NOT** attempt installation. Contact a qualified electrician.
- Do **NOT** make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- **WARNING:** To prevent wiring damage or abrasion, do **NOT** expose wiring to edges of sheet metal or other sharp objects.
- This fixture is accepted as a component of a luminaire where the suitability of the combination shall be determined by authorities having jurisdiction. Product must be installed by a qualified electrician in accordance with the applicable and appropriate electrical codes. The installation guide does not supersede local national regulations for electrical installation.
- Caution: Risk of fire! Consult a qualified electrician to ensure the correct branch circuit conductor.


### CLEANING & MAINTENANCE:

CAUTION: Be sure the fixture temperature is cool enough to touch. Do **NOT** clean or maintain while the fixture is energized.

1. Clean frosted polystyrene lens and fixture with non-abrasive cleaning solution.
2. Do **NOT** open fixture to clean the LEDs. Do **NOT** touch the LEDs.



Note: These instructions do not cover all details or variation in equipment, nor do they provide for every possible situation during installation, operation or maintenance.

### INSIDE THE BOX:

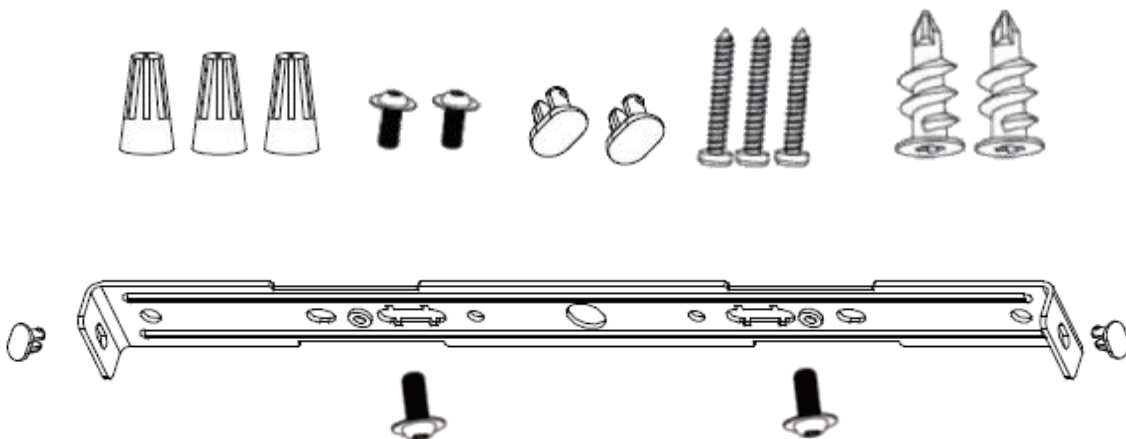

**JBOX INSTALLATION:**

1. Turn off power.
2. Fix the bracket onto the junction box with the screws.
3. Connect the wires using existing wire connector and fix the panel onto the ceiling with the screws.

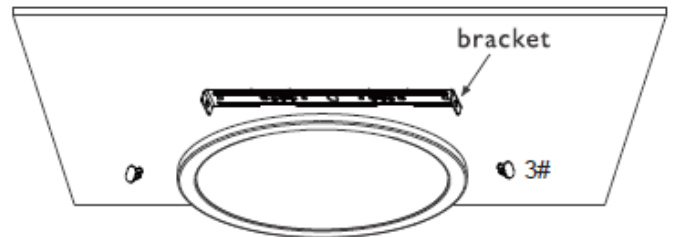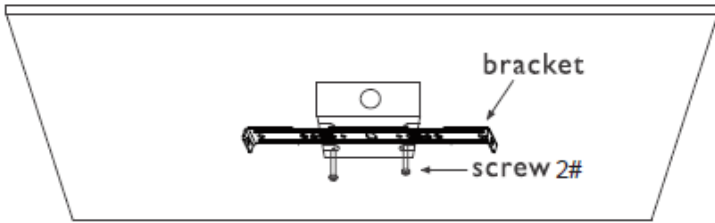

**SURFACE MOUNT INSTALLATION:**

1. Turn power off
2. Drill holes in the ceiling and fix the holes with the big plastic plugs.
3. Fix the bracket onto the ceiling with the screw.
4. Connect the wires using existing wire connector. Fix the panel onto the ceiling with the screws.

