

LED MULTI WATTAGE MULTI CCT 4 FOOT WRAP AROUND LIGHT



30W / 40W / 50W / 60W

CONSTRUCTION:

22-gauge metal housing with matte white finish. PMMA cover lens.

OPTICAL SYSTEM:

Samsung 2835 LED chips. Frosted lens. 110° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Suspension or surface mounting options.

Metal joiner bracket

CONTROLS & DIMMING:

0-10V dimming comes standard.

FEATURES

- **Default Wattage:** 60W
- **Default CCT:** 5,000K
- IP20 rated
- ABS endcaps design for easy install/removal of lens
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Parking Lots
- Supermarkets
- Corridors
- Retail Spaces
- Warehouses



OPTIONAL ACCESSORIES:



Emergency Battery
LOC-EMDR-15W-050



Suspension Kit
(NOT included)



Metal Joiner Bracket
(NOT included)


LINKING TOGETHER:

| SIZE | VOLTAGE | QUANTITY |
|------|---------|----------|
| 4FT | @120V | 7 |
| 4FT | @277V | 17 |
| 4FT | @347V | 21 |

LOC-4FTWA-MW(30/40/50/60)MCCT(35/40/50)

| WATTAGE SELECTABLE | CCT SELECTABLE | LUMENS | EFFICACY | VOLTAGE | CRI | POWER FACTOR | THD | REPLACES |
|--------------------|-----------------------|---------|----------|----------|-----|--------------|-----|----------|
| 30W | 3500K / 4000K / 5000K | 3,900LM | 130lm/W | 120-277V | 80 | 0.9 | 20% | |
| 40W | 3500K / 4000K / 5000K | 5,200LM | 130lm/W | 120-277V | 80 | 0.9 | 20% | |
| 50W | 3500K / 4000K / 5000K | 6,500LM | 130lm/W | 120-277V | 80 | 0.9 | 20% | |
| 60W | 3500K / 4000K / 5000K | 7,800LM | 130lm/W | 120-277V | 80 | 0.9 | 20% | |

MEASUREMENTS

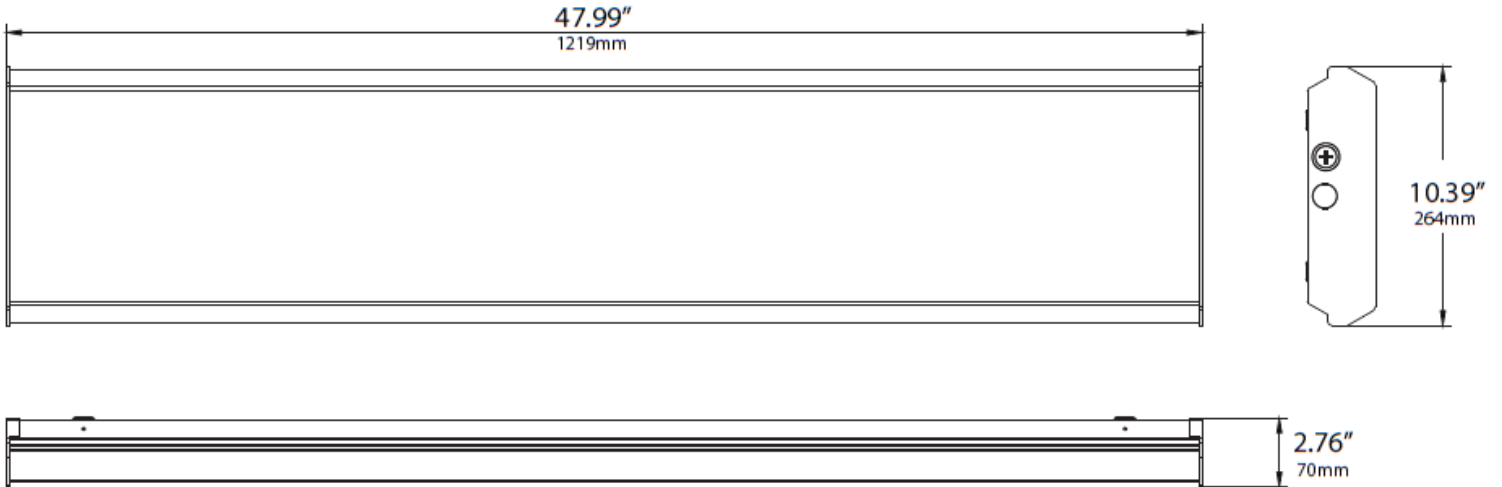

| MODEL | QTY | NET WEIGHT | MASTER CARTON SIZE | GROSS WEIGHT | PCS CTN | UPC CODE |
|-----------------------------------------|-----|------------|-------------------------|--------------|---------|----------------|
| LOC-4FTWA-MW(30/40/50/60)MCCT(35/40/50) | 1 | 10.14 lbs | 49.88" x 11.77" x 3.46" | 12.35 lbs | 1 | 00810050947053 |